


**Construction Notes:**

- 1) Typical material 3/4" AC plywood. Hardwood veneer ply can be used for a more durable box.
- 2) Assemble complete box with wood glue and nails (or screws). Avoid nailing close to the lid seam (2 1/2" down from the top).
- 3) Set the fence of the table saw to 2 1/2" and carefully saw the lid off of the box. Start with the ends, then do the sides. Requires two people.
- 4) Install hardware. Hasp should be centered on one side, chest handles centered on the ends, and hinges installed 6" from the edges of the box.
- 5) Scraps can be used to make a tray or dividers. Cleats can be added to the bottom if floor clearance is desired.
- 6) Sand and paint the finished box with a durable exterior gloss paint.

<b>Show Box</b>		
Scale: 1:8	Drawn by: M. Spiess	7/8/13

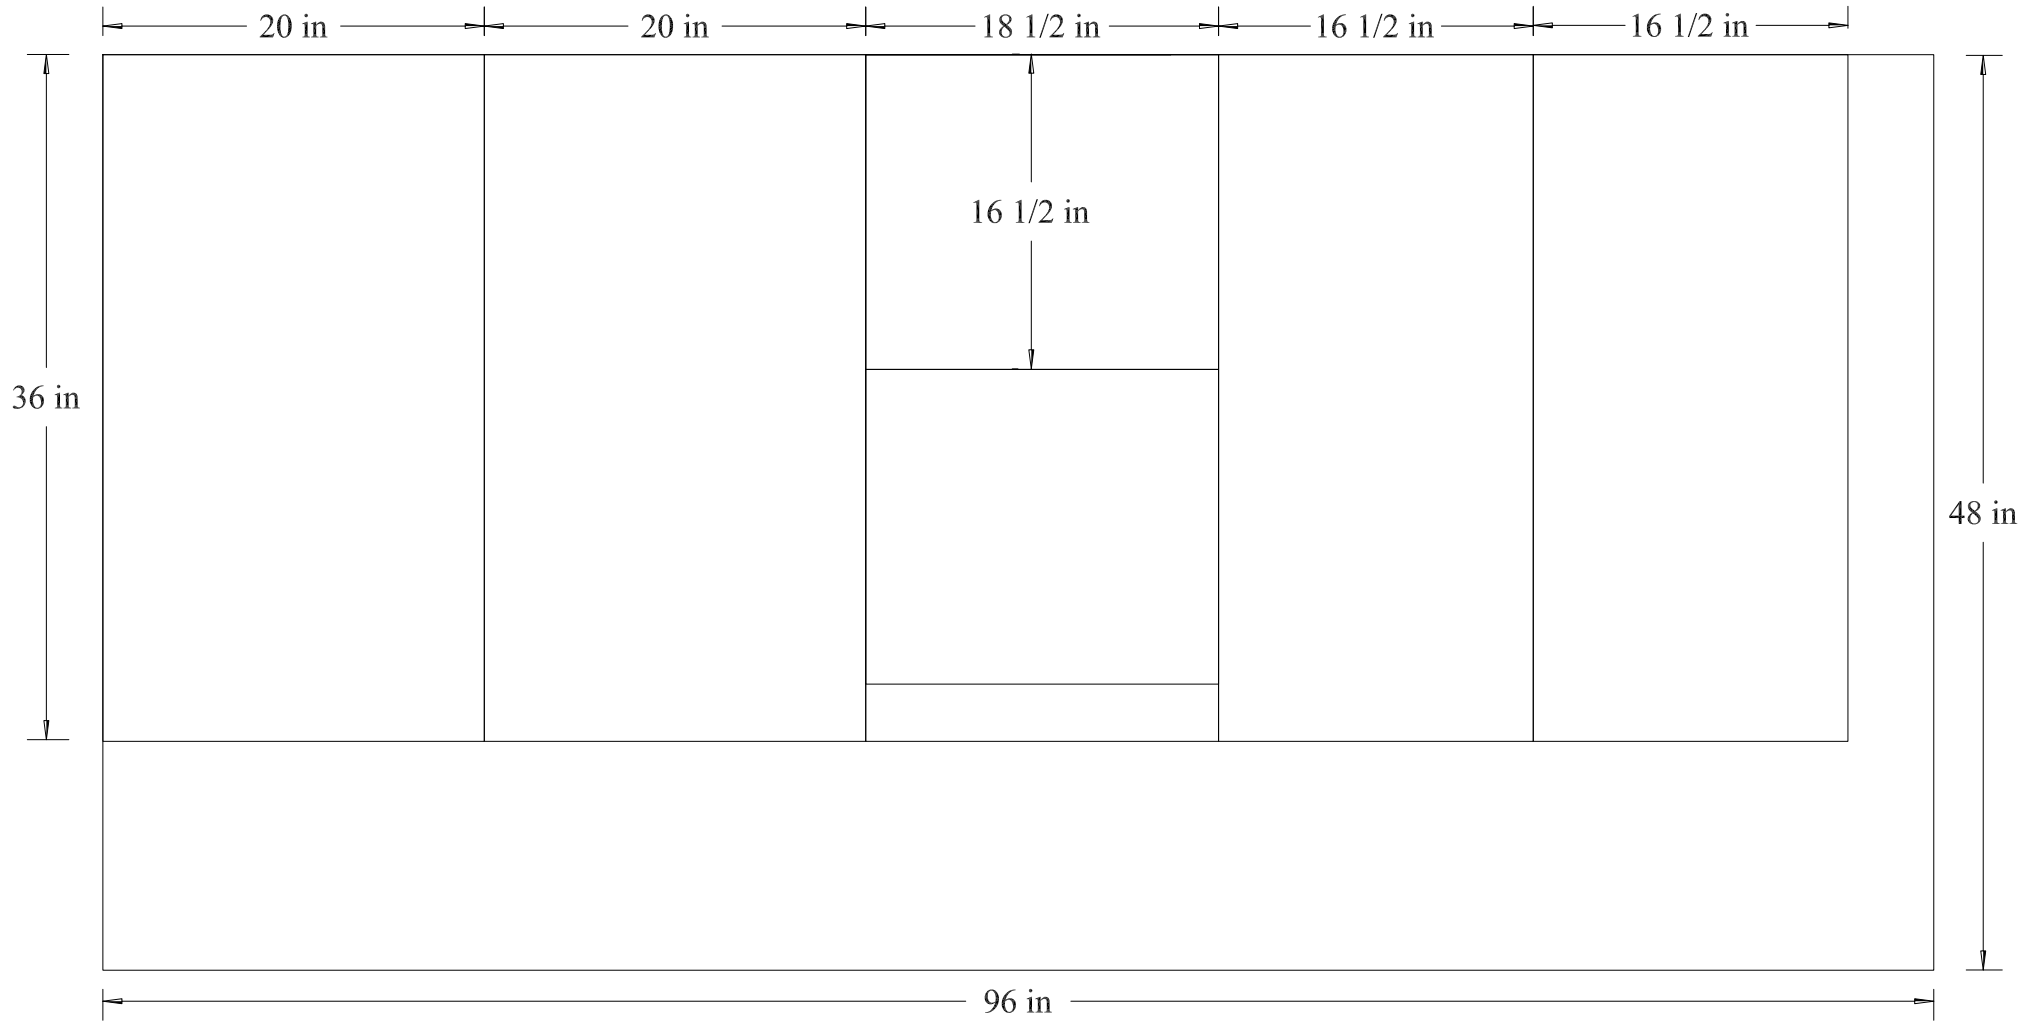

<b>Show Box Layout</b>		
No Scale	Drawn by: M. Spiess	7/8/13